



HY-L600

LED SPOT WITH FRAMING

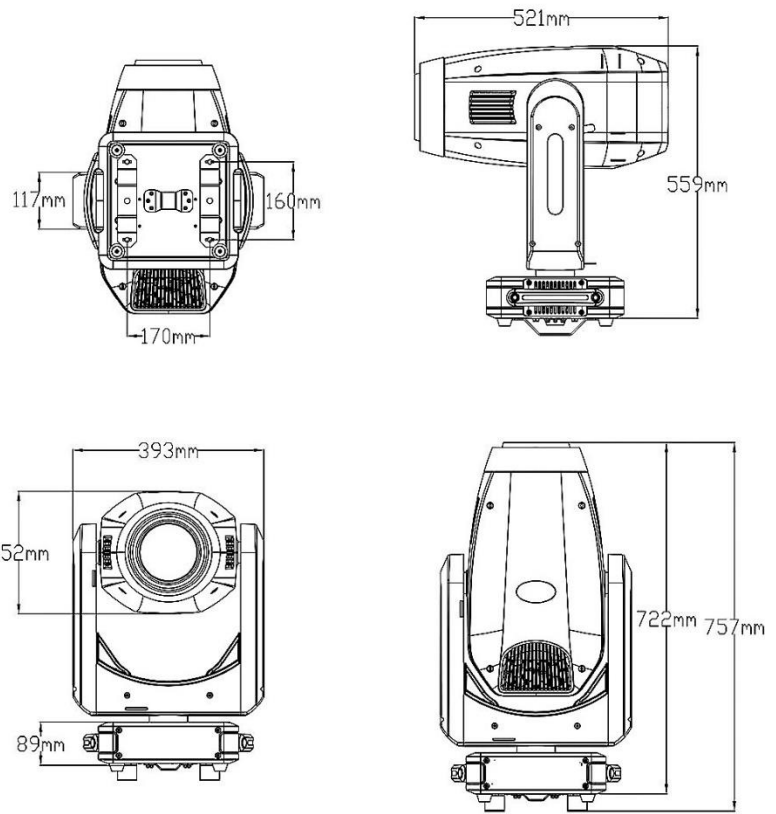


光源	600w LED (8000K/6500K)		
電源	100-240V 50/60Hz		
最大消費電力	850w		
カラー	FixColor×6・CMY Mixing・CTO		
ビーム角	7°~42°	プリズム	5面円形
フレーミング	4ブレード	チャンネル	34ch/54ch
付属品	ハンガー(Φ38~51mm 対応)×2・ワイヤー・電源ケーブル(平行G付・PowerCON True 1)		
重量	30kg		
ケース	1060×580×850mm・37kg (2灯入)		


Static Gobo Wheel

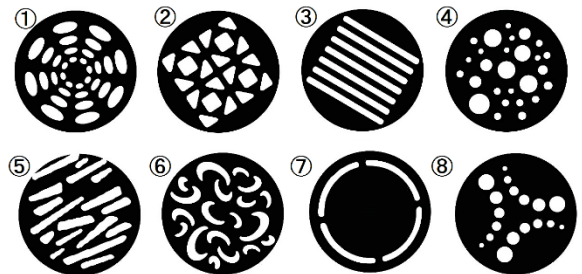


Rotating Gobo Wheel

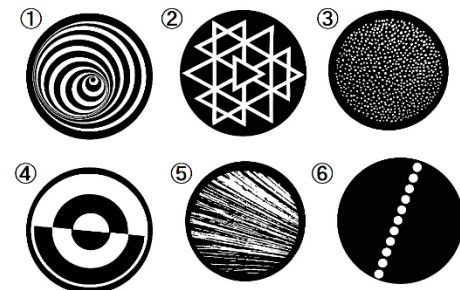

Animation Wheel



Illumination

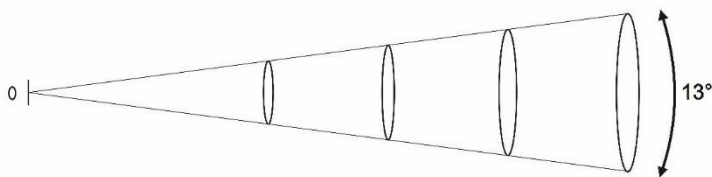

illumination	19347LM	12000LM	2747LM	2000LM
Spot Diameter	●1.1m	●2.3m	●3.17m	●4.6m
optical range	5m	10m	15m	20m

Low Ra:	5m Ra: 74.2	spot 0.65m	23733LM
	5m Ra: 74.2	spot 1.1m	19347LM
	5m Ra: 74.2	spot 3.17m	2747LM
Hight Ra:	5m Ra: 96	spot 0.65m	22298LM

DMX channel List

Mode		Value	Function
34CH	54CH		
1	1		Pan Movement 8bit:
		0-255	Pan Movement
2	2		Pan Fine 16bit
		0-255	Fine control of Pan movement
3	3		Tilt Movement 8bit:
		0-255	Tilt Movement
4	4		Tilt Fine 16bit
		0-255	Fine control of Tilt movement
5	5		Speed Pan/Tilt movement:
		0-255	max to min speed
6	6		Shutter,stroke
		0-10	Shutter closed
		11-21	Shutter open
		22-126	Strobe effect slow to fast
		127-137	Shutter open
		138-201	Pulse-effect in sequences
		202-212	Shutter open
		213-244	Random strobe effect slow to fast
		245-255	Shutter open
7	7		Dimmer intensity:
		0-255	Intensity 0 to 100%
8	8		Dimmer intensity Fine:
		0-255	Dimmer intensity fine
8	9		Zoom:
		0-255	Zoom adjustment from small to big
9	10		Zoom Fine:
		0-255	Zoom adjustment Fine
9	11		Focus:
		0-255	Continuous adjustment from near to far
10	13		Focus Fine:
		0-255	Continuous adjustment Fine
			Auto Focus:
		0-51	Auto Focus Off
		52-102	5m
11	14		Auto Focus Fine:
		0-255	Continuous adjustment Fine
			Color Wheel:
		0-15	Open
		16-23	Open/Color1
12	15	24-31	Color1 : R
		32-39	Color1/Color2
		40-47	Color2 : G
		48-54	Color2/Color3
		55-63	Color3 : B
		64-71	Color3/Color4
		72-79	Color4 : Y
		80-87	Color4/Color5
		88-95	Color5 : A
		96-103	Color5/Color6
		104-111	Color6 : M
		112-119	Color6/Color7
		120-127	Color7
		128-189	Forwards rainbow effect from fast to slow
		190-193	No rotation
194-255	Backwards rainbow effect from slow to fast		
13	16		Color Wheel Fine:
		0-255	Color Wheel colour change to any position Fine
13	17		Cyan Color:
		0-255	Cyan (0-white,255-100% Cyan)
14	18		Cyan Color Fine:
		0-255	Cyan Fine
14	19		Magenta Color:
		0-255	Magenta (0-white,255-100% Magenta)
14	20		Magenta Color Fine:
		0-255	Magenta Fine

Mode		Value	Function
34CH	54CH		
15	21		Yellow Color:
		0-255	Yellow (0-white,255-100% Yellow)
16	22		Yellow Color Fine:
		0-255	Yellow Fine
16	23		CTO Color:
		0-255	CTO (0-white,255-100% CTO)
17	24		CTO Color Fine:
		0-255	CTO Fine
			Rotating gobos,cont.rotation 1:
		0-21	Open
		21-27	Rot.gobo1
		28-41	Rot.gobo2
		42-55	Rot.gobo3
		56-69	Rot.gobo4
		70-83	Rot.gobo5
		84-97	Rot.gobo6
		98-105	Open
		106-119	Gobo 1 shake slow to fast
		120-133	Gobo 2 shake slow to fast
		134-147	Gobo 3 shake slow to fast
		148-161	Gobo 4 shake slow to fast
162-175	Gobo 5 shake slow to fast		
176-189	Gobo 6 shake slow to fast		
190-221	Gobo wheel rotation forwards from fast to slow		
222-223	No rotation		
224-225	Gobo wheel rotation backwards from slow to fast		
18	26		Rotating gobo index,rotating gobo rotation 1:
		0-127	Gobo indexing
		128-189	Forwards gobo rotation from fast to slow
		190-193	No rotation
18	27		Rotating gobo indexing Fine 1:
		0-255	Fine indexing
19	28		Fixed Gobo2:
		0-13	Open
		14-24	Gobo 1
		25-35	Gobo 2
		36-46	Gobo 3
		47-57	Gobo 4
		58-68	Gobo 5
		69-79	Gobo 6
		80-90	Gobo 7
		91-101	Gobo 8
		102-112	Gobo 1 shake slow to fast
		113-123	Gobo 2 shake slow to fast
		124-134	Gobo 3 shake slow to fast
		135-145	Gobo 4 shake slow to fast
		146-156	Gobo 5 shake slow to fast
		157-167	Gobo 6 shake slow to fast
		168-178	Gobo 7 shake slow to fast
		179-189	Gobo 8 shake slow to fast
190-221	Gobo wheel rotation forwards from fast to slow		
222-223	No rotation		
224-255	Gobo wheel rotation backwards from slow to fast		
20	29		Animation wheel:
		0-127	Animation indexing
		128-158	Forwards rotation from fast to slow
		159-162	No rotation
		163-193	Backwards rotation from slow to fast
21	30		Iris:
		0-255	Max.diameter to Min.diameter
22	31		Iris Fine:
		0-255	Iris Fine
22	32		Prism:
		0-127	Open
		128-255	Prism

Mode		Value	Function
34CH	54CH		
23	33		Rotating prism index,rotating prism rotation
		0-127	Prism indexing
		128-189	Forwards prism rotation from fast to slow
		190-193	No rotation
		194-255	Backwards prism rotation from slow to fast
	34		Rotating prism indexing Fine:
		0-255	Fine indexing
24	35		Frost:
		0-127	Open
		128-255	Frost
25	36		Blade 1A: 上
		0-255	Open to Close
	37		Blade 1A Fine:
		0-255	Open to Close Fine
26	38		Blade 1B:
		0-255	Blade 1 Rotation
	39		Blade 1B Fine:
		0-255	Blade 1 Rotation Fine
27	40		Blade 2A: 下
		0-255	Open to Close
			Blade 2A Fine:
	41	0-255	Open to Close
			Blade 2B:
28	42	0-255	Blade 2 Rotation
			Blade 2B Fine:
	43	0-255	Blade 2 Rotation Fine
			Blade 3A: 右
29	44	0-255	Open to Close
			Blade 3A Fine:
	45	0-255	Open to Close
			Blade 3B:
30	46	0-255	Blade 3 Rotation
			Blade 3B Fine:
	47	0-255	Blade 3 Rotation Fine
			Blade 4A: 左
31	48	0-255	Open to Close
			Blade 4A Fine:
	49	0-255	Open to Close
			Blade 4B:
32	50	0-255	Blade 4 Rotation
			Blade 4B Fine:
	51	0-255	Blade 4 Rotation Fine
			All Blade Rotation:
33	52	0-255	All Blade Rotation
			All Blade Rotation Fine:
	53	0-255	All Blade Rotation Fine
			Reset, LCD, Fans
34	54	0-9	unused
		10-19	Display Off
		20-29	Display On
		30-39	Display Invert Off
		40-49	Display Invert On
		50-59	Auto fan control mode
		60-69	High fan control mode
		70-79	Silent fan control mode
		80-89	Square Law
		90-99	Linear
		100-109	unused
		110-119	unused
		120-129	unused
		130-139	unused
		140-149	unused
		150-159	All motor reset
		160-169	Scan motor reset P/T
		170-179	Colors motor reset
		180-189	Gobo motor reset
		190-199	Other motor reset Beam
200-255	unused		

