



# HY-L600

## LED SPOT WITH FRAMING

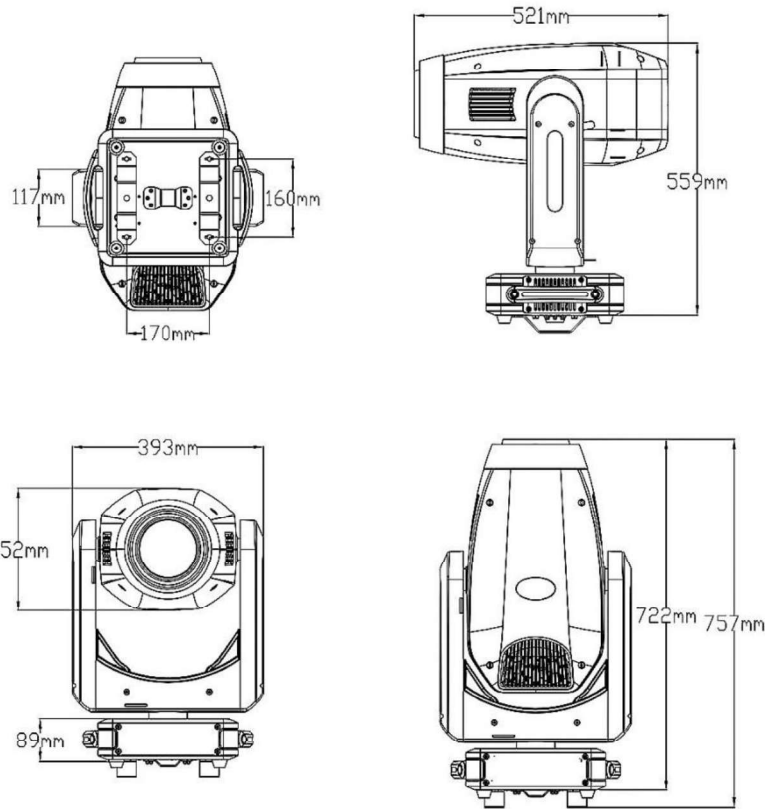


光源	600w LED (8000K/6500K)		
電源	100-240V 50/60Hz		
最大消費電力	850w		
カラー	FixColor×6・CMY Mixing・CTO		
ビーム角	7°~42°	プリズム	5面円形
フレーミング	4ブレード	チャンネル	34ch/54ch
付属品	ハンガー(Φ38~51mm 対応)×2・ワイヤー・電源ケーブル(平行G付・PowerCON True 1)		
重量	30kg		
ケース	1060×580×850mm・37kg(2灯入)		


### Static Gobo Wheel

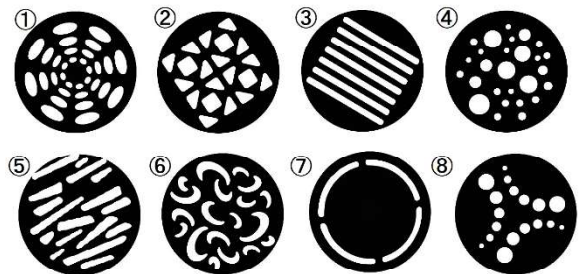


### Rotating Gobo Wheel

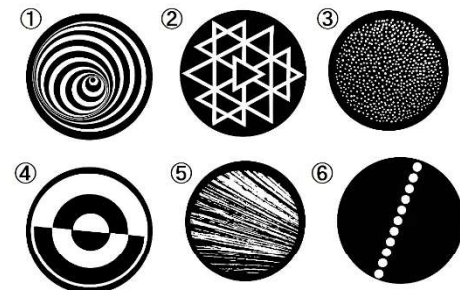

### Animation Wheel



### Illumination

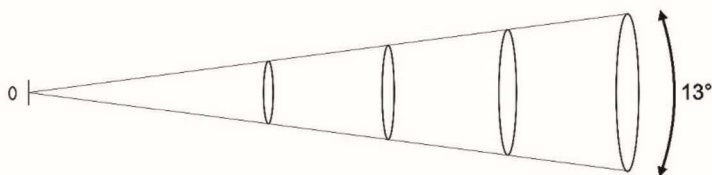

illumination	19347LM	12000LM	2747LM	2000LM
Spot Diameter	●1.1m	●2.3m	●3.17m	●4.6m
optical range	5m	10m	15m	20m

Low Ra:	5m Ra: 74.2	spot	0.65m	23733LM
	5m Ra: 74.2	spot	1.1m	19347LM
	5m Ra: 74.2	spot	3.17m	2747LM
Hight Ra:	5m Ra: 96	spot	0.65m	22298LM

# DMX channel List

Mode		Value	Function
34CH	54CH		
1	1		<b>Pan Movement 8bit:</b>
		0-255	Pan Movement
2	2		<b>Pan Fine 16bit</b>
		0-255	Fine control of Pan movement
3	3		<b>Tilt Movement 8bit:</b>
		0-255	Tilt Movement
4	4		<b>Tilt Fine 16bit</b>
		0-255	Fine control of Tilt movement
5	5		<b>Speed Pan/Tilt movement:</b>
		0-255	max to min speed
6	6		<b>Shutter,stroke</b>
		0-10	Shutter closed
		11-21	Shutter open
		22-126	Strobe effect slow to fast
		127-137	Shutter open
		138-201	Pulse-effect in sequences
		202-212	Shutter open
		213-244	Random strobe effect slow to fast
245-255	Shutter open		
7	7		<b>Dimmer intensity:</b>
		0-255	Intensity 0 to 100%
8	8		<b>Dimmer intensity Fine:</b>
		0-255	Dimmer intensity fine
8	9		<b>Zoom:</b>
		0-255	Zoom adjustment from small to big
9	10		<b>Zoom Fine:</b>
		0-255	Zoom adjustment Fine
9	11		<b>Focus:</b>
		0-255	Continuous adjustment from near to far
10	12		<b>Focus Fine:</b>
		0-255	Continuous adjustment Fine
			<b>Auto Focus:</b>
		0-51	Auto Focus Off
10	13	52-102	5m
		103-153	7.5m
		154-204	10m
		205-255	15m
11	14		<b>Auto Focus Fine:</b>
		0-255	Continuous adjustment Fine
12	15		<b>Color Wheel:</b>
		0-15	Open
		16-23	Open/Color1
		24-31	Color1 : R
		32-39	Color1/Color2
		40-47	Color2 : G
		48-54	Color2/Color3
		55-63	Color3 : B
		64-71	Color3/Color4
		72-79	Color4 : Y
		80-87	Color4/Color5
		88-95	Color5 : A
		96-103	Color5/Color6
		104-111	Color6 : M
		112-119	Color6/Color7
		120-127	Color7
12	15	128-189	Forwards rainbow effect from fast to slow
		190-193	No rotation
		194-255	Backwards rainbow effect from slow to fast
			<b>Color Wheel Fine:</b>
13	16	0-255	Color Wheel colour change to any position Fine
			<b>Cyan Color:</b>
13	17	0-255	Cyan (0-white,255-100% Cyan)
			<b>Cyan Color Fine:</b>
14	18	0-255	Cyan Fine
			<b>Magenta Color:</b>
14	19	0-255	Magenta (0-white,255-100% Magenta)
			<b>Magenta Color Fine:</b>
	20	0-255	Magenta Fine

Mode		Value	Function
34CH	54CH		
15	21		<b>Yellow Color:</b>
		0-255	Yellow (0-white,255-100% Yellow)
16	22		<b>Yellow Color Fine:</b>
		0-255	Yellow Fine
16	23		<b>CTO Color:</b>
		0-255	CTO (0-white,255-100% CTO)
17	24		<b>CTO Color Fine:</b>
		0-255	CTO Fine
17	25		<b>Rotating gobos,cont.rotation 1:</b>
		0-21	Open
		21-27	Rot.gobo1
		28-41	Rot.gobo2
		42-55	Rot.gobo3
		56-69	Rot.gobo4
		70-83	Rot.gobo5
		84-97	Rot.gobo6
		98-105	Open
		106-119	Gobo 1 shake slow to fast
		120-133	Gobo 2 shake slow to fast
		134-147	Gobo 3 shake slow to fast
		148-161	Gobo 4 shake slow to fast
		162-175	Gobo 5 shake slow to fast
		176-189	Gobo 6 shake slow to fast
		190-221	Gobo wheel rotation forwards from fast to slow
222-223	No rotation		
224-225	Gobo wheel rotation backwards from slow to fast		
18	26		<b>Rotating gobo index,rotating gobo rotation 1:</b>
		0-127	Gobo indexing
		128-189	Forwards gobo rotation from fast to slow
		190-193	No rotation
18	27	194-255	Backwards gobo rotation from slow to fast
			<b>Rotating gobo indexing Fine 1:</b>
	27	0-255	Fine indexing
19	28		<b>Fixed Gobo2:</b>
		0-13	Open
		14-24	Gobo 1
		25-35	Gobo 2
		36-46	Gobo 3
		47-57	Gobo 4
		58-68	Gobo 5
		69-79	Gobo 6
		80-90	Gobo 7
		91-101	Gobo 8
		102-112	Gobo 1 shake slow to fast
		113-123	Gobo 2 shake slow to fast
		124-134	Gobo 3 shake slow to fast
		135-145	Gobo 4 shake slow to fast
		146-156	Gobo 5 shake slow to fast
		157-167	Gobo 6 shake slow to fast
168-178	Gobo 7 shake slow to fast		
179-189	Gobo 8 shake slow to fast		
190-221	Gobo wheel rotation forwards from fast to slow		
222-223	No rotation		
224-255	Gobo wheel rotation backwards from slow to fast		
20	29		<b>Animation wheel:</b>
		0-127	Animation indexing
		128-158	Forwards rotation from fast to slow
		159-162	No rotation
		163-193	Backwards rotation from slow to fast
21	30	194-255	Effect
			<b>Iris:</b>
	30	0-255	Max.diameter to Min.diameter
22	31		<b>Iris Fine:</b>
		0-255	Iris Fine
22	32		<b>Prism:</b>
		0-127	Open
	32	128-255	Prism

Mode		Value	Function
34CH	54CH		
23	33		<b>Rotating prism index,rotating prism rotation</b>
		0-127	Prism indexing
		128-189	Forwards prism rotation from fast to slow
		190-193	No rotation
		194-255	Backwards prism rotation from slow to fast
	34		<b>Rotating prism indexing Fine:</b>
		0-255	Fine indexing
24	35		<b>Frost:</b>
		0-127	Open
		128-255	Frost
25	36		<b>Blade 1A: 上</b>
		0-255	Open to Close
	37		<b>Blade 1A Fine:</b>
		0-255	Open to Close Fine
26	38		<b>Blade 1B:</b>
		0-255	Blade 1 Rotation
	39		<b>Blade 1B Fine:</b>
		0-255	Blade 1 Rotation Fine
27	40		<b>Blade 2A: 下</b>
		0-255	Open to Close
			<b>Blade 2A Fine:</b>
	41	0-255	Open to Close
			<b>Blade 2B:</b>
28	42	0-255	Blade 2 Rotation
			<b>Blade 2B Fine:</b>
	43	0-255	Blade 2 Rotation Fine
			<b>Blade 3A: 右</b>
29	44	0-255	Open to Close
			<b>Blade 3A Fine:</b>
	45	0-255	Open to Close
			<b>Blade 3B:</b>
30	46	0-255	Blade 3 Rotation
			<b>Blade 3B Fine:</b>
	47	0-255	Blade 3 Rotation Fine
			<b>Blade 4A: 左</b>
31	48	0-255	Open to Close
			<b>Blade 4A Fine:</b>
	49	0-255	Open to Close
			<b>Blade 4B:</b>
32	50	0-255	Blade 4 Rotation
			<b>Blade 4B Fine:</b>
	51	0-255	Blade 4 Rotation Fine
			<b>All Blade Rotation:</b>
33	52	0-255	All Blade Rotation
			<b>All Blade Rotation Fine:</b>
	53	0-255	All Blade Rotation Fine
			<b>Reset, LCD, Fans</b>
34	54	0-9	unused
		10-19	Display Off
		20-29	Display On
		30-39	Display Invert Off
		40-49	Display Invert On
		50-59	Auto fan control mode
		60-69	High fan control mode
		70-79	Silent fan control mode
		80-89	Square Law
		90-99	Linear
		100-109	unused
		110-119	unused
		120-129	unused
		130-139	unused
		140-149	unused
		150-159	All motor reset
		160-169	Scan motor reset P/T
		170-179	Colors motor reset
		180-189	Gobo motor reset
		190-199	Other motor reset Beam
200-255	unused		

