STRIKE4

LED ミニブル

Front

Rear

付属品　電源ケーブル
落下防止ワイヤー

STRIKE 4	
メーカー	CHAUVET　professional
重量	8.7kg
電源	100-240V、 50/60Hz
電源ケーブル	パワコン-平行 3P
消費電力	400W （100W LED×4）
DMX	5P キャノンコネクター In/Out
チャンネル	1、3、4、9ch
光角	50°

●寸法図

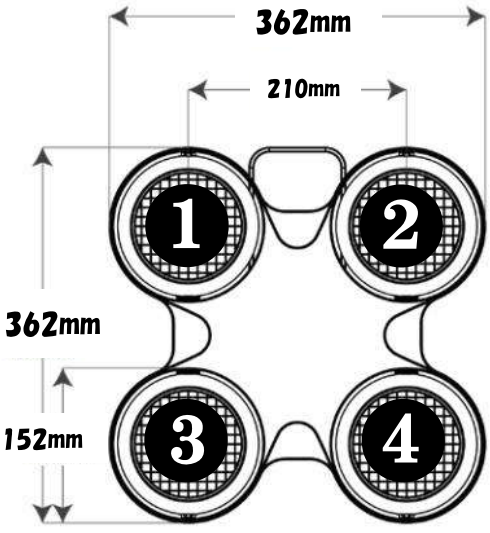



パラメーター				
	1ch	3ch	4ch	9ch
1	Dimmer High	Dimmer High	White 1	Dimmer High
2		Dimmer Low	White 2	Dimmer Low
3		Strobe	White 3	Strobe
4			White 4	White 1
5				White 2
6				White 3
7				White 4
8				Auto Programs
9				Dimmer Curve

※Dimmer Low の 100%は High の 10%

DMX Values

9 Ch

Channel	Function	Value	Percent/Setting
1	Dimmer H	000⇔255	0–100%
2	Dimmer L	000⇔255	0–100%
3	Strobe	000⇔010 011⇔132 133⇔255	No function 0–20 Hz (All pods) 0–20 Hz (Random strobe macros)
4	White 1	000⇔255	0–100%
5	White 2	000⇔255	0–100%
6	White 3	000⇔255	0–100%
7	White 4	000⇔255	0–100%
8	Auto Programs	000⇔010 011⇔040 041⇔080 081⇔120 121⇔160 161⇔200 201⇔240 241⇔255	No function Auto 1 Auto 2 Auto 3 Auto 4 Auto 5 Auto 6 No function
9	Dimmer Speed	000⇔010 011⇔040 041⇔080 081⇔120 121⇔255	Preset dimmer speed from display menu Nonlinear dimming curve 1 (fastest) Nonlinear dimming curve 2 Nonlinear dimming curve 3 (slowest) Preset dimmer speed from display menu

1 Ch

Channel	Function	Value	Percent/Setting
1	Dimmer H	000⇔255	0–100%

3 Ch

Channel	Function	Value	Percent/Setting
1	Dimmer H	000⇔255	0–100%
2	Dimmer L	000⇔255	0–100%
3	Strobe	000⇔010 011⇔132 133⇔255	No function 0–20 Hz (All pods) 0–20 Hz (Random strobe macros)

4 Ch

Channel	Function	Value	Percent/Setting
1	White 1	000⇔255	0–100%
2	White 2	000⇔255	0–100%
3	White 3	000⇔255	0–100%
4	White 4	000⇔255	0–100%